


Damper

Application:

The Damper is made of high-strength, aging resistant and highly elastic PVC plastics and installation of product is quick and easy. The Damper is applicable for ADSS and OPGW cable may generate damping effect on wind vibration, consume the energy of cable vibration and inhibit vibration of cable, thereby protecting the cable.

Product Picture:

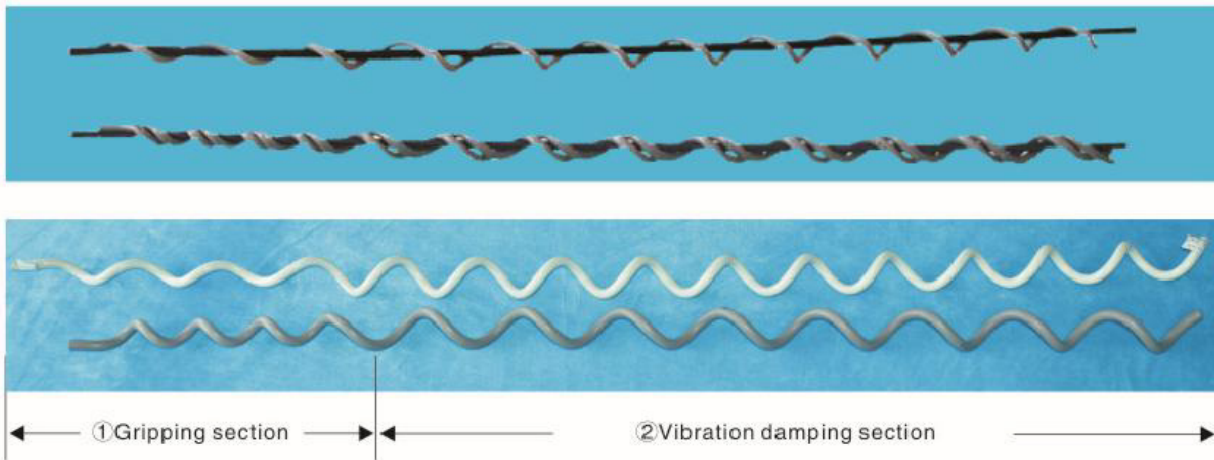

Configuration of the damper:

No.	Line span (L) mm	Number of damper each span(pieces)
1	100-250	2
2	251-500	4
3	500-750	6
4	751-1000	8

Product Selection Table:

No.	Applicable cable diameter(mm)	Enchantment length(mm)	Product length(mm)	Weight(kg)
1	6.30-8.29	250	1250	0.26
2	8.30-11.70	250	1300	0.28
3	11.71-14.30	250	1350	0.30
4	14.31-19.30	300	1670	0.66
5	19.31-22.20	300	1800	0.71

* Other type of damper can be designed according to customer's requirements.