


Suspension Set for Short Span

Application:

ADSS cable suspension clamp is used to connect all dielectric self-support cables (ADSS) to straight line towers. Dynamic stress of wind vibration can be suppressed by the product to improve optical vibration resistance. The product may also ensure that the bending of cable does not exceed the allowable value, so as to prevent the optical fiber from generating attachment loss.

Product Picture:

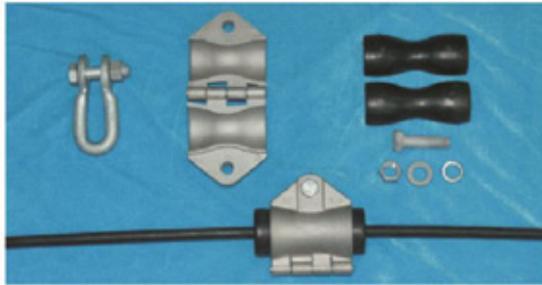

SAXD-100-XX suspension clamp



SAXD-150-XX suspension clamp

Product Picture:

The product has features of simple structure, light weight and easy installation. Vertical destructive power of the clamp: 30KN.

Parameters:

No.	Applicable cable diameter(mm)	Applicable span(\leq m)	Product weight(kg)
010-1000	9.0-10.0	100	0.8
010-1100	10.1-11.0	100	0.8
010-1200	11.1-12.0	100	0.8
010-1300	12.1-13.0	100	0.8
010-1400	13.1-14.0	100	0.8
010-1500	14.1-15.0	100	0.8
010-1600	15.1-16.0	100	0.8
015-0940	9.0-9.4	150	1.0
015-1040	9.5-10.4	150	1.0
015-1150	10.5-11.5	150	1.1
015-1240	11.6-12.4	150	1.02
015-1340	12.5-13.4	150	1.05
015-1420	13.5-14.2	150	1.05
015-1490	14.3-14.9	150	1.1
015-1590	15.0-15.9	150	1.1

* Other type of tension set can be designed according to customer's requirements.