



ZP9202-DWHT

WiFi 5 AC1200 DualBand GPON Router

2GE+CATV+AC1200 GPON ONU

802.11ac2.4GHz	300Mbps
802.11ac5GHz	900Mbps



IPv4 & IPv6
Dual stack



E/GPON Dual
Mode



Routing & Bridging
Mode



Dual Band 4*Antennas
AC 1200Mbps

Introduction

ZP9202-DWHT is 2GE+CATV+AC1200 with USB optional XPON(GPON and GEPON dual mode) HGU ONU. The device is fully comply with ITU-T G.984/G988 and IEEE802.3ah. The equipment integrates the reliability maintainability and security design of carrier-grade level and provides customers with the last kilometer of broadband access to residential and corporate customers. It can also be applied to a strictly temperature environment, and can work stable for longtime without service interruption.


ZP9202-DWHT is interoperable with all brands of OLT and Easy to install, provisioning and maintenance. The device can identify the working mode of the OLT to automatically complete the switch between GPON and EPON, The device can be freely switched between bridge and routing modes, and supports PPPoE dial-up and IPv6 functions in routing mode to meet the needs of different scenarios.

ZP ELECTRON CO.,INC

Address: 438 JinCheng Road, XiaoShan District, Hang Zhou City, ZheJiang
Tel: +0086-571-82893391 Mobile Phone: +0086-13666654184
E-Mail: info@zpcable.com Skype: samzpcable Website: www.zpcable.com



Application Chart

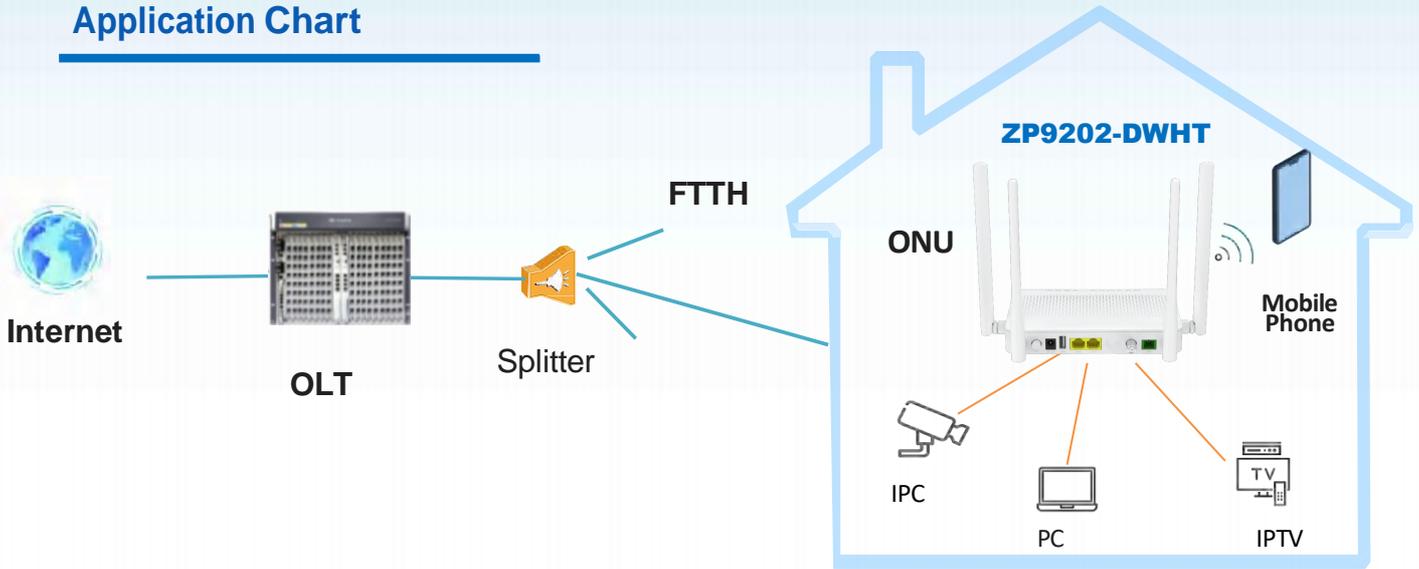

Product Interface and LED

1. Power on the device



4. Connect WiFi and test speed

3. Connect Ethernet port, set up the services and browser internet



2. Plug in the fiber and register device to the OLT





Product Parameters

Hardware Parameter	
Dimension	220mm×130mm×30mm (L×W×H)
Net weight	294g
Operating condition	<ul style="list-style-type: none">• Operating temperature: -10 ~ +50°C• Operating humidity: 10 ~ 90% (non-condensing)
Storing condition	<ul style="list-style-type: none">• Storage temperature: -40 ~ +70°C• Storage humidity: 5 ~ 95% (non-condensing)
Power adapter	DC 12V/1A, external AC-DC power adapter
Interfaces	XPON+2×GE+USB2.0+CATV+WiFi AC1200
Buttons	Reset,WPS
Indicators	Power, PON, LOS,Internet, LAN1-2, USB, 2.4G, 5G, WPS, CATV

Interface Parameter	
PON interface	<ul style="list-style-type: none">• 1XPON port(EPON PX20+ and GPON Class B+)• PON standard: GEAPON IEEE802.3ah, GPON ITU-T G.984• SC single mode, SC/UPC or SC/APC connector• TX optical power: 0~4dBm(EPON) or 0.5~5dBm(GPON)• RX sensitivity: EPON: -27dBm, GPON: -28dBm• Overload optical power: -3dBm(EPON) or -8dBm(GPON)• Transmission distance: 20KM• Wavelength: TX 1310nm, RX1490nm, CATV 1550nm
LAN interface	<ul style="list-style-type: none">• 2×GE Auto-negotiation RJ45 ports
USB interface	<ul style="list-style-type: none">• 1×USB 2.0
CATV interface	<ul style="list-style-type: none">• RF Optical power : +2~-18dBm• Optical return loss: ≥45 dB• Optical receiving wavelength: 1550±10nm• RF frequency range: 47~1000MHz• RF output impedance: 75Ω• RF output return loss: ≥14 dB• RF output level: ≥ 76±2dBuV(@-15~0dBm)• AGC range: 0~-15dBm• C/N: ≥47dB@-7dBm• CTB: ≥60dB@-7dBm• CSO: ≥60dB@-7dBm• MER: ≥35dB(-10dBm optical input)
WiFi interface	<ul style="list-style-type: none">• Compliant with IEEE802.11b/g/n/ac• WiFi: 2.4GHz 2×2, 5.8GHz: 2×2 MIMO• 4*5dBi external antennas• Multiple SSID

ZP ELECTRON CO.,INC

Address: 438 JinCheng Road, XiaoShan District, Hang Zhou City, Zhejiang
Tel: +0086-571-82893391 Mobile Phone: +0086-13666654184
E-Mail: info@zpcable.com Skype: samzpcable Website: www.zpcable.com





Software Features

PON	<ul style="list-style-type: none"> • XPON Dual Mode • SN and LOID+Password multiple registration methods
Layer2	<ul style="list-style-type: none"> • Support VLAN transparent/ tag/ translate/ trunk • Support Layer 2 802.1Q VLAN, 802.1P QoS, ACL etc
Layer3	<ul style="list-style-type: none"> • IPv4, IPv6 and IPv4/IPv6 dual stack • Support bridge, router & bridge/router mixed mode • DHCP v4/v6 Client/Server, PPPoE & Static • Support Static Routing • Support hardware NAT
Multicast	<ul style="list-style-type: none"> • Support IGMP v2 and MLD proxy/ snooping • Support MultiCast VLAN & MultiCast Maximum Address
Security and Firewall	<ul style="list-style-type: none"> • DDoS, Filtering Based on ACL/MAC/URL • Support DDNS, ALG, UPnP, Port forwarding, DMZ • HTTP/SSH/Telnet Service Access Control • Support Parent control • Support PPTP , L2TP, Pass-through service
QoS	<ul style="list-style-type: none"> • Support 4 queues • Support SP, WRR, 802.1P and DSCP
WiFi	<ul style="list-style-type: none"> • Integrated 802.11b/g/n/ac • Authentication:WEP/WAP-PSK(TKIP)/WAP2-PSK(AES) • Modulation type:DSSS,CCK and OFDM • Easymesh
Management	<ul style="list-style-type: none"> • Support Telnet, CLI, OMCI/OAM ,TR069 and Web management

Package

Package	<ul style="list-style-type: none"> • 1 x ONU • 1 x Quick Installation Guide • 1 x Power Adaptor
---------	--

Ordering information

Product Name	Product Description	Accessories
ZP9202-DWHT	XPON+2GE+USB2.0+CATV+WiFi AC1200	AC-DC power adaptor: DC12V/1A
ZP9212-DWHT	XPON+2GE+1POTS+USB2.0+CATV+WIFI AC1200	AC-DC power adaptor:DC12V/1A
ZP9202-DWH	XPON+2GE+USB2.0+WIFI AC1200	AC-DC power adaptor:DC12V/1A

ZP ELECTRON CO.,INC

Address: 438 JinCheng Road, XiaoShan District, Hang Zhou City, Zhejiang

Tel: +0086-571-82893391 Mobile Phone: +0086-13666654184

E-Mail: info@zpcable.com Skype: samzpcable Website: www.zpcable.com

